



TPI
CORPORATION
America's Comfort Conditioning Company

2018 SUMMER
SALE

© Copyright 2018; TPI Corporation | 1-800-682-3398 | 1-423-477-4131 | www.tpicorp.com | answers@tpicorp.com

PORTABLE BLOWERS DIRECT DRIVE



MOTOR: Single phase, ball-bearing, permanently lubricated, PSC type
BLADE: Steel hub, spider, & paddles
SWITCH: Rocker
CORD: 12' long SJT type 3 conductor
GUARD: Spiral steel wire coated (front & rear)
WHEELS: 8" rubber
HOUSING: Corrosion & dent resistant high density polyethylene black housing
SPEED: 2-speed (42' is single speed)



SHIPS FULLY ASSEMBLED

MODELS	BLADE SIZE	MOTOR TYPE	MOTOR HP	CFM MAX. VELOCITY	COVERAGE AREA SQ.FT.	AMPS	PRICE EACH
PB 36-D	36"	Direct Drive	1/3	11,500	320	5.5	\$430.65
PB 42-D	42"		1/2	15,000	340	6.0	\$605.55

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY



PORTABLE BLOWERS BELT DRIVE



MOTOR: Single phase, ball-bearing, permanently lubricated, capacitor start
BLADE: Steel hub, spider, & aluminum paddles (48" steel)
SWITCH: Rocker
CORD: 12' long SJT type 3 conductor
GUARD: Spiral steel wire coated (front & rear)
WHEELS: 10" rubber, 1" thick
HOUSING: Corrosion & dent resistant high density polyethylene black housing
SPEED: All models single speed

10" RUBBER WHEELS

SWIVEL MODELS ROTATE 360°

SHIPS FULLY ASSEMBLED

SWIVEL MODEL

STANDARD MODEL

MODELS		BLADE SIZE	MOTOR TYPE	MOTOR HP	CFM MAX. VELOCITY	COVERAGE AREA SQ.FT.	AMPS	PRICE EACH	
STANDARD	SWIVEL							STANDARD	SWIVEL
PB 36-B	PBS 36-B	36"	Belt Drive	1/2	14,000	360	8.0	\$640.20	\$754.05
PB 42-B	PBS 42-B	42"		3/4	17,500	420	11.0	\$731.50	\$867.35
PB 48-B	PBS 48-B	48"		1	23,500	550	15.0	\$820.60	\$977.35

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY



30" INDUSTRIAL AIR CIRCULATOR HIGH PERFORMANCE 1/3 HP

FAN HEAD ASSEMBLED AT FACTORY TO SIMPLIFY INITIAL SETUP

MOTOR: 2-Speed, 1/3 HP, 120V, single phase, totally enclosed (TEAO), ball bearing, PSC type
BLADE: Steel hub, spider, with aluminum paddles
SWITCH: Pull Chain
CORD: 12' long SJT type 3 conductor
GUARD: Spiral steel wire coated (front & rear)
POLE: Pedestal pole adjusts center of fan from 48" - 67"



High performance 1/3 HP motor runs 15% - 18% cooler than standard 1/4 HP motors & allows fan to continue operating in air temperatures up to 135°F



FAN HEAD (IHP30-H)
\$265.10



PEDESTAL (ACM-P)
\$108.90



WALL MOUNT (ACM-W)
\$42.35



I-BEAM MOUNT (ACM-I)
\$82.50



CEILING MOUNT (ACM-C)
\$45.65

MODEL	BLADE SIZE	MOTOR TYPE	FAN TYPE	MOTOR HP	CFM MAX. VELOCITY	COVERAGE AREA SQ.FT.	AMPS	PRICE EACH
IHP 30-H	30"	Totally Enclosed	Non-Oscillating	1/3	7,200	250	3.0	\$265.10

Must order fan head and mount separately

3 Year Motor Warranty

24" & 30" INDUSTRIAL AIR CIRCULATORS OSCILLATING & NON-OSCILLATING 1/4 HP

ALL FAN COMPONENTS SHIPPED IN ONE UPS-ABLE CARTON



MOTOR: 2-Speed, 1/4 HP, 120V, single phase, totally enclosed (TEAO), ball bearing, PSC type
BLADE: Steel hub, spider, with aluminum paddles
SWITCH: Pull Chain
CORD: 12' long SJT type 3 conductor
GUARD: Spiral steel wire coated (front & rear)
POLE: Pedestal pole adjusts center of fan from 48" - 67"

Oscillates horizontally in a 90° arc or can be locked in a fixed position

Metal gears in the oscillating mechanism allow the fan to operate at a maximum 30° downward tilt



ACU 30-WO



ACU 30-P

MODELS	BLADE SIZE	MOTOR TYPE	FAN TYPE	FAN MOUNT	MOTOR HP	CFM MAX. VELOCITY	COVERAGE AREA SQ.FT.	AMPS	PRICE EACH
ACU 24-P	24"	Totally Enclosed	Non-Oscillating	Pedestal	1/4	6,000	240	2.5	\$255.75
ACU 30-P	30"					7,200	250	2.7	\$262.90
ACU 24-W	24"			Wall		6,000	240	2.5	\$212.85
ACU 30-W	30"					7,200	250	2.7	\$220.55
ACU 30-PO	30"		Oscillating	Pedestal	1/4	6,000	240	2.5	\$395.45
ACU 30-WO				Wall		7,200	250	2.7	\$332.20

Models include fan motor, grills, and mount in one carton.

1 Year Motor Warranty

30" INDUSTRIAL AIR CIRCULATOR HEAVY DUTY - SAFETY YELLOW 1/2 HP

FAN HEAD ASSEMBLED AT FACTORY TO SIMPLIFY INITIAL SETUP

MOTOR: 2-Speed, 1/2 HP, 120V, single phase, totally enclosed (TEAO), ball bearing, PSC type
BLADE: Steel hub, spider, with aluminum paddles
SWITCH: Pull Chain
CORD: 12' long SJT type 3 conductor
GUARD: Spiral steel wire coated (front & rear)
POLE: Pedestal pole adjusts center of fan from 48" - 67"



FAN HEAD
(HDH 30-H)
\$354.20

PEDESTAL
(HDM-P)
\$115.50

**SAFETY
YELLOW
COLOR**



Must order fan head and mount separately

MODEL	BLADE SIZE	MOTOR TYPE	FAN TYPE	MOTOR HP	CFM MAX. VELOCITY	COVERAGE AREA SQ.FT.	AMPS	PRICE EACH
HDH 30	30"	Totally Enclosed	Non-Oscillating	1/2	8,000	270	4.0	\$354.20

Meets Federal OSHA Requirements / 5 Year Motor Warranty

INDUSTRIAL FLOOR FANS

MOTOR: 3-Speed, 1/8 HP, 120V, single phase, sleeve-bearing, totally enclosed (TEAO), permanently lubricated, PSC type
BLADE: Steel hub, spider, with aluminum paddles
SWITCH: Rotary
CORD: 10' long SJT type 3 conductor
GUARD: Spiral steel wire coated (front & rear)



**ALL METAL CONSTRUCTION
TOTALLY ENCLOSED MOTOR**

MODELS	BLADE SIZE	MOTOR TYPE	FAN TYPE	MOTOR HP	CFM MAX. VELOCITY	COVERAGE AREA SQ.FT.	AMPS	PRICE EACH
F-12-TE	12"	Totally Enclosed	Floor	1/12	1,400	50	1.1	\$83.60
F-18-TE	18"			1/8	2,900	125	2.2	\$105.05
F-24-TE	24"				3,500	150	2.4	\$126.50
F-18H-TE	18"		High Stand	1/8	2,900	125	2.2	\$152.35
F-24H-TE	24"				3,500	150	2.4	\$170.50

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY



INDUSTRIAL WORKSTATION FANS

MOTOR: 3-Speed, 120V, single phase, sleeve-bearing, totally enclosed, permanently lubricated, PSC type
SWITCH: Pull Chain
CORD: 10' long SJT type 3 conductor
GUARD: Spiral coated steel wire, FDA white/gray



SHIPPED FULLY ASSEMBLED

MOUNTS TO:

**MACHINES, WORKBENCHES, CEILING, OR
WALLS WITH ONE BOLT OR LAG SCREW**



**Totally Enclosed Motor Fans
U-TE Series**
Gray grill & black yoke



**Corrosion Resistant Fans
U-CR Series**
White grill & black yoke

MODELS	BLADE SIZE	MOTOR TYPE	MOTOR HP	CFM MAX. VELOCITY	COVERAGE AREA SQ.FT.	AMPS	PRICE EACH
U-12-TE	12"	Totally Enclosed	1/12	1,400	50	1.1	\$87.45
U-18-TE	18"		1/8	2,900	125	2.2	\$107.80
U-24-TE	24"			3,500	150	2.4	\$121.00
U-18-CR	18"	Corrosion Resistant	1/8	2,900	125	2.2	\$219.45
U-24-CR	24"			3,500	150	2.4	\$250.80

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY



INDUSTRIAL SHUTTER MOUNTED EXHAUST FANS

Shutter mounted fans install on side wall & eliminate the need for external framing

- MOTOR:** 120V, 1-Phase, totally enclosed, permanently lubricated
- 1/12 HP motor is 3-Speed sleeve bearing permanent split capacitor
 - 1/8 HP motor is 3-Speed sleeve bearing permanent split capacitor
 - 1/4 HP motor is 2-Speed ball bearing permanent split capacitor
- BLADE:** 3-Paddle aluminum blade
- SWITCH:** Pull chain
- CORD:** No cord – junction box provided for direct wiring
- GUARD:** Spiral steel wire coated
- SHUTTER:** Aluminum louvers & steel frame design for gravity close direct airflow
Includes weather stripping for tighter seal



**CE-DS
SERIES**

MODELS	BLADE SIZE	MOTOR TYPE	MOTOR BEARING	MOTOR HP	CFM			AMPS	PRICE EACH
					HIGH	MEDIUM	LOW		
CE 12-DS	12"	Totally Enclosed	Sleeve	1/12	825	710	560	1.1	\$200.20
CE 14-DS	16"			1/8	2,100	1,900	1,700	2.1	\$253.55
CE 18-DS	18"				2,300	2,100	1,850	2.2	\$288.20
CE 20-DS	20"		Ball	1/4	2,925	N/A	2,380	2.3	\$341.55
CE 24-DS	24"				3,400	N/A	150	2.5	\$380.05

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY

INDUSTRIAL LOADING DOCK FAN

- ARM:** 1 1/2" square, triple-arm strut, 14-gauge steel tubing
- FINISH:** Chip resistant safety yellow & black powder coated
- CORD:** 5' long SJT type 3 conductor
- FAN:** 18" all metal fan with 3-speed, 1/8 HP, PSC totally enclosed motor, 2.2A, 120V

40" DOCK ARM REACH

LIGHT HEAD TYPE	MAX WATTS	MAX LUMENS	AVG BULB LIFE (HRS)	INCLUDED	
				BULB	GUARD
Incandescent	300	3,700	2,000	No	Yes
LED	37	12,373	30,000	Yes	No



Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY



Light head sold separately.

40-LDF-TE
(40" Arm & 18" Fan Head)
\$220.00

DKL-INC
(Incandescent)
\$45.10

DKL-LED-37
(LED)
\$181.50

INDUSTRIAL CEILING FANS

COMMERCIAL GRADE


- Assembly required
- 30" lead wires
- 1 year limited warranty

INDUSTRIAL GRADE

- Fully assembled except blade bolt down
- 3 conductor cord, 30" long with plug
- Permanently lubricated
- 3 year limited warranty

HEAVY DUTY GRADE

- Fully assembled except blade bolt down
- 3 conductor cord, 30" long with plug
- Permanently lubricated
- 6 year limited warranty

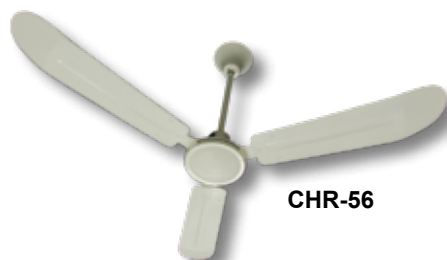

CHR-56

- MOTOR:** 18 pole, 115V, 1-phase, capacitor type, impedance protected motor with sealed ball bearings
- MOUNT:** 24" down rod with safety cable. Mount to 3/8" diameter steel J-hook
- MATERIAL:** All metal construction with white epoxy finish

56" Down Draft (CHR-56)
\$102.30

56" Reversible (IHR-56R)
\$147.40

60" Down Draft Water/Dust Resistant (HDHR-60WR)
\$228.80

DISTRIBUTED BY: